
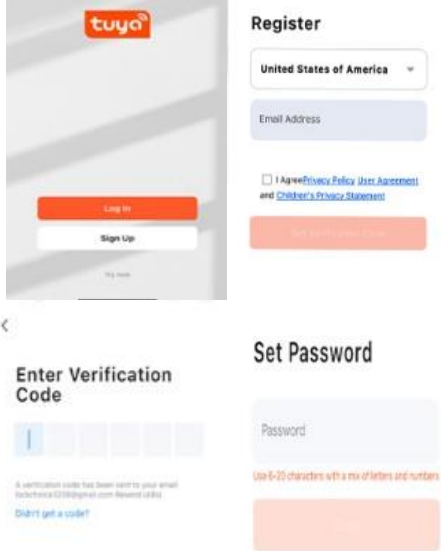
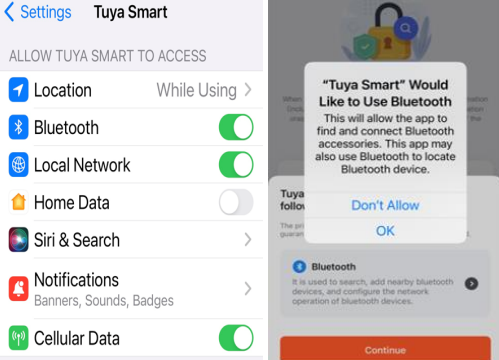


## BS-H-3 Access Control APP user manual


### A. Set up APP :

<p>1. Go to the Apple Store or Google Play to Download “Tuya Smart” APP to your Cell phone .</p>	
<p>2. Open Tuya APP to Click “Sign Up”. 3. Enter your email to click “Get Verification code.” 4. Enter Verification code 5. Set up Password</p>	
<p>6. Turn on Tuya Bluetooth , Location and Local Network on phone setting , Then click ok to log in APP . 7. Just Touch Keypad to turn on . Click "+" Sign on top right of APP. Then Press “Add Device”</p>	


8. It will start to search device . At this time ,  
Click Add when APP discovered device

**Note:**


Please bring BS- device within 9 Feet for  
first time setting up .  
Click Add .

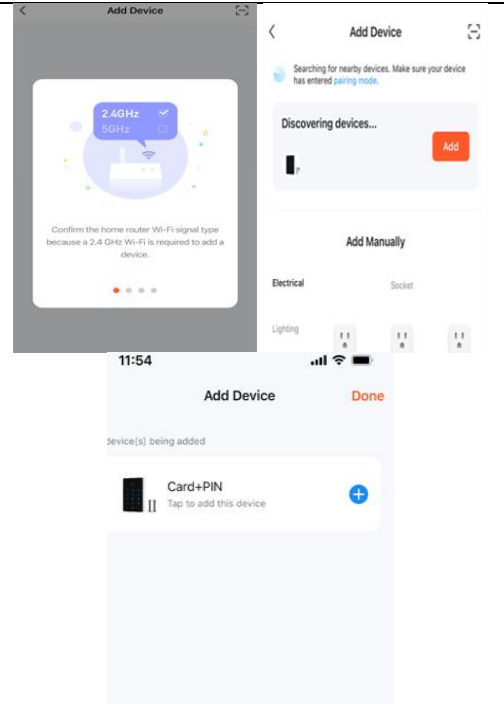


9. Then press “Blue Color + Sign” to set up  
Wifi connection .

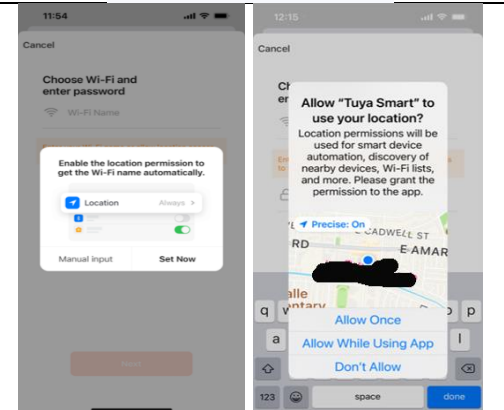

10. Type in your Wifi Router password

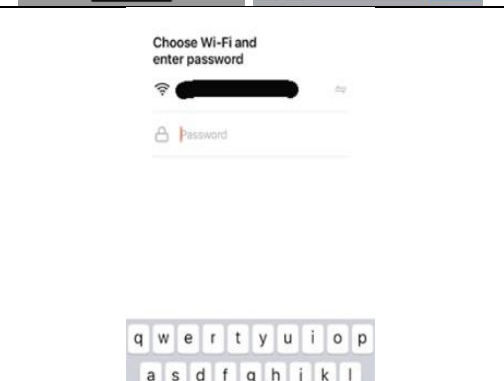


11. After the set up Wifi connection , The device will be added successfully .
12. Press “Done” to finish setting up .

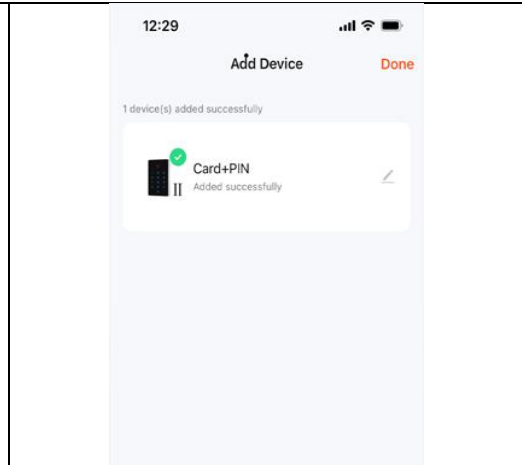

**B: User Manual: APP supports 100 Cell phone users and 100 Pin code or Cards.**

1. Add access control name :  
Click Access control1 to add or change the name .
2. Unlock:  
Press 2 seconds to unlock the door from anywhere .

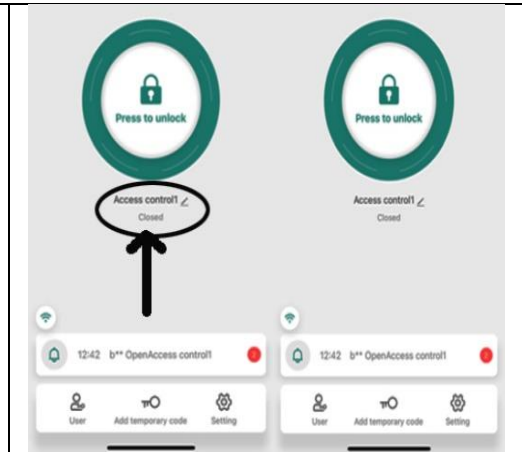

**Note:**

If you remove the Administrator from the APP , All Cards and Passcodes are still retained.  
 If Administrator is removed , All Member users on the APP will have no access to the device.  
 There is only one Administrator on the APP . if the Administrator phone lost , How to remove Administrator account from the APP ?


Please use access keypad to press : \* (Master Code ) # 9 ( Master code ) # .  
 (Default Master Code is 123456)

Then you can add new Administrator on the APP

After Reset factory default , Administrator account from the APP will be removed .

You have to follow this step to add Administrator account to the APP :

\* (Master Code ) # 9 ( Master code ) # .
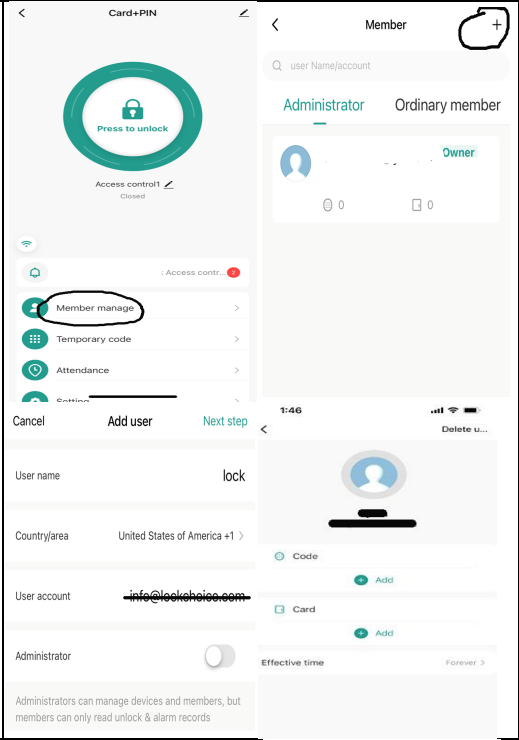
<p><b>Add User:</b>  Click “Member Manage” on the bottom to add user .(User must create a account first from APP)  Click + on top right .  3. Type in User Name , Change Country/area to United States  Type in User account E-mail .  Keep or Change Administrator status .  Click Next Step  Device Icon will show on User APP .  User only can lock or unlock  If you add a user as Administrator , This user will have all Administrator authorities.  Administrator can add and delete user .  Administrator can add 6 digits password or key card for user and issue effective time .  Administrator still can track who and when open the door when you click Bell Sign .  All users are on the ordinary member list .</p>	
<p>4. Set up Temporary code:  Click “Add Temporary code” on the bottom.  Administrator can issue cyclicity or once temporary code.</p>	